

# Omada Gigabit VPN Router

MODEL: ER7206 V2



## Highlights

- Dual-core ARM® Cortex-A53 processor and 512MB DDR4 high-speed memory for outstanding performance
- Equipped with 1 Gigabit SFP WAN/LAN port, 1 Gigabit RJ45 WAN port, 4 Gigabit RJ45 WAN/LAN ports and 1 USB3.0 port (supports USB LTE dongle and USB Storage)
- Supports multiple VPN protocols including SSL/ Wireguard/ OpenVPN/ GRE VPN/ IPSec/ PPTP/ L2TP/ L2TP over IPSec, helping users to establish VPN connections more flexibly
- Captive portal provides a convenient method for guest authentication
- Abundant features including load balance, bandwidth control and access control
- Professional 4 kV lightning protection keeps your investments as safe as possible

# Omada Solution



## Hospitality

High Quality and Full Coverage Wi-Fi



## Education

High-Density Wi-Fi



## Retail

Social Marketing for O2O



## Office

Wireless and Wired Connections




## Catering

Full Wi-Fi Coverage in High-Density Environment

## Software Defined Networking (SDN) with Cloud Access

Omada Software Defined Networking (SDN) platform integrates network devices, including access points, switches and gateways, providing 100% centralized cloud management. Omada creates a highly scalable network—all controlled from a single interface. Seamless wireless and wired connections are provided, ideal for use in hospitality, education, retail, offices, and more.

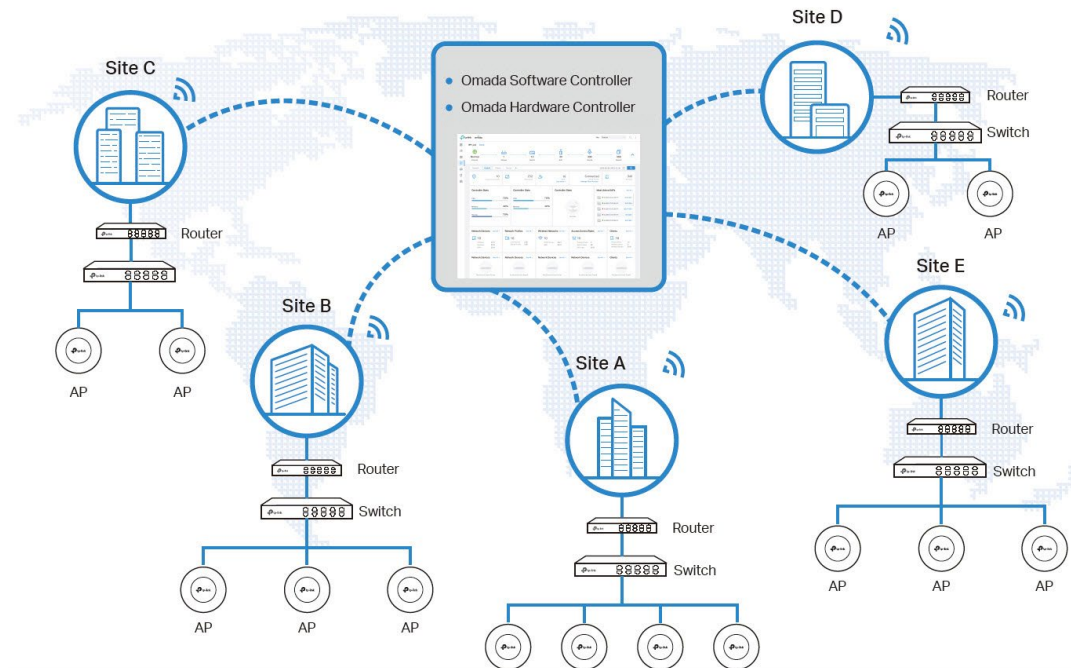

# Hassle-Free Centralized Cloud Management


100% centralized cloud management of the whole network from different sites—all controlled from a single interface anywhere, anytime.



- ✓ No additional training needed
- ✓ Unlimited scalability
- ✓ Batch management
- ✓ Devices still work even when not connected to the Cloud

## Assign Different Management Roles


Multi-user privilege assignment is available to increase management efficiency and security. Multi-person management, multi-level permissions, and the ability to add admins as needed, enable flexible network operation and maintenance.

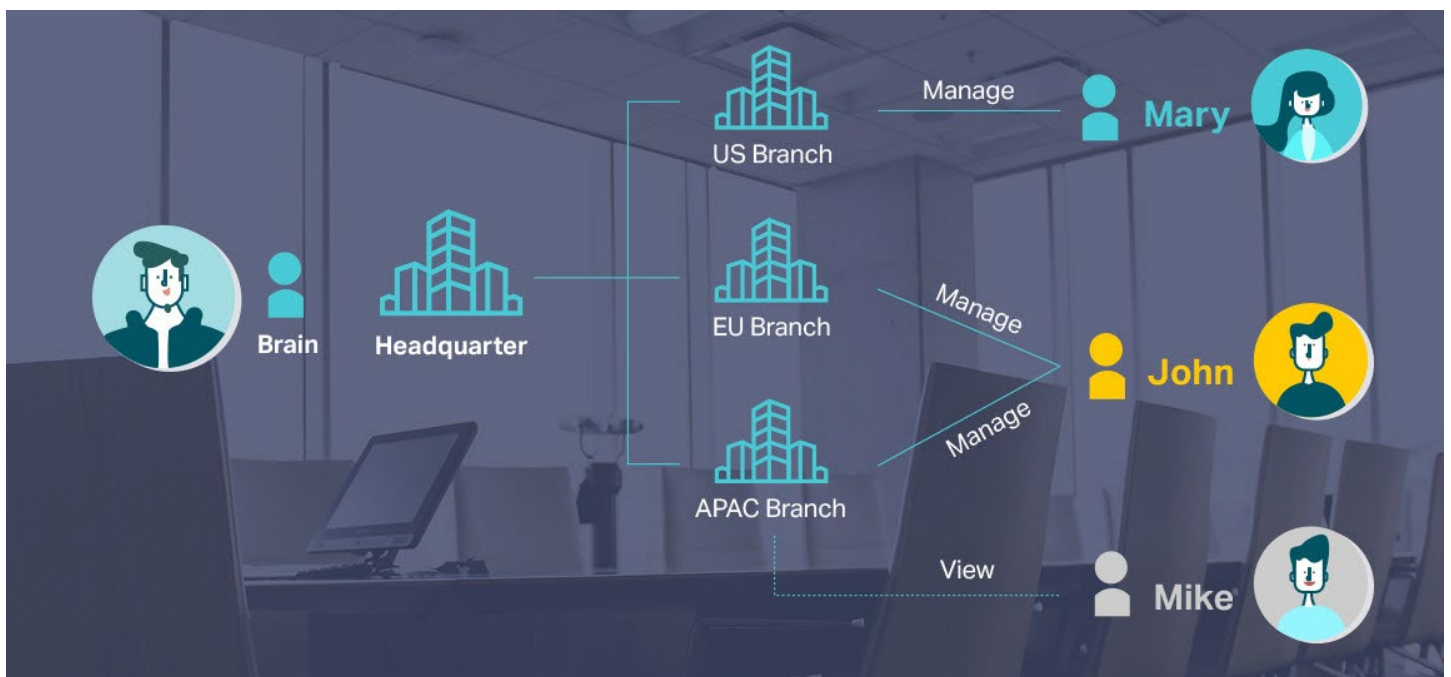




# Easy and Intelligent Network Monitoring


The easy-to-use dashboard makes it easy to see your real-time network status; check network usage and traffic distribution; receive network condition logs, abnormal event warnings, and notifications; or even track key data for better business results. Network topology helps IP admins quickly see and troubleshoot connection at a glance.

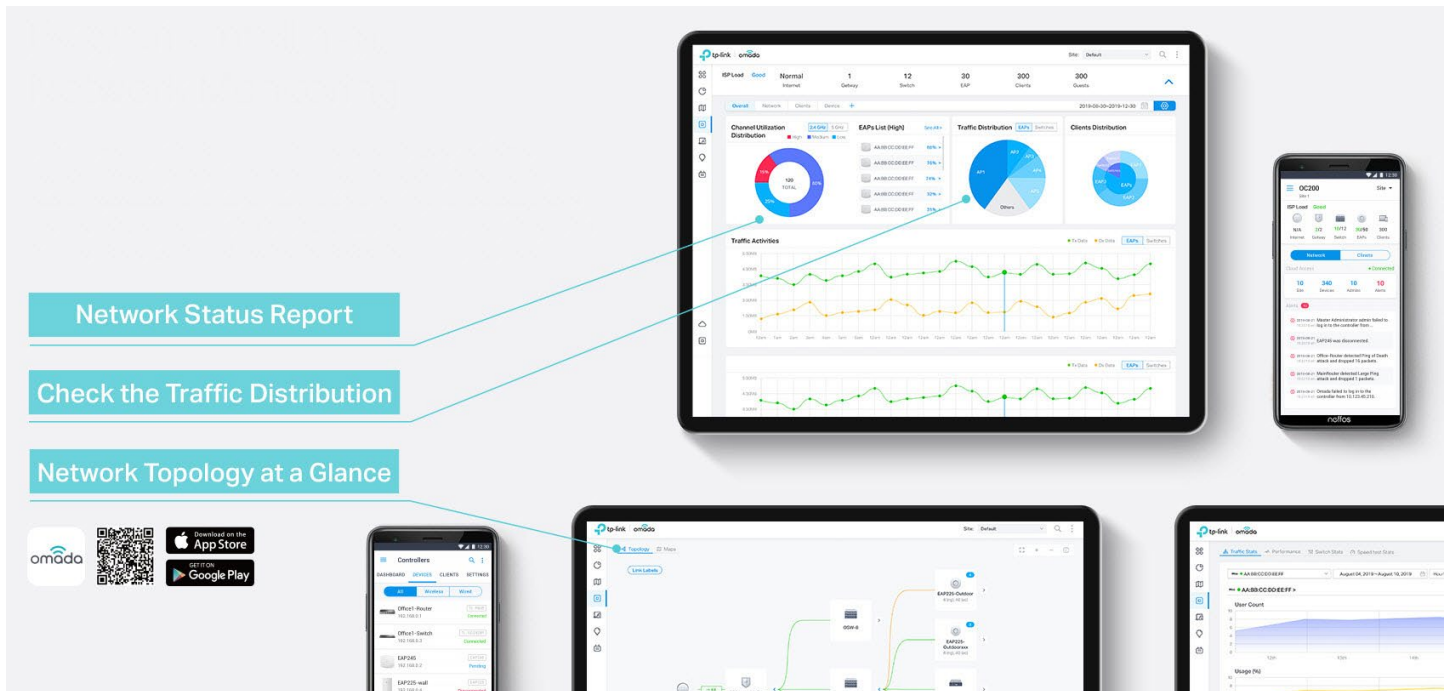

# Comprehensive Protection for the Whole Network

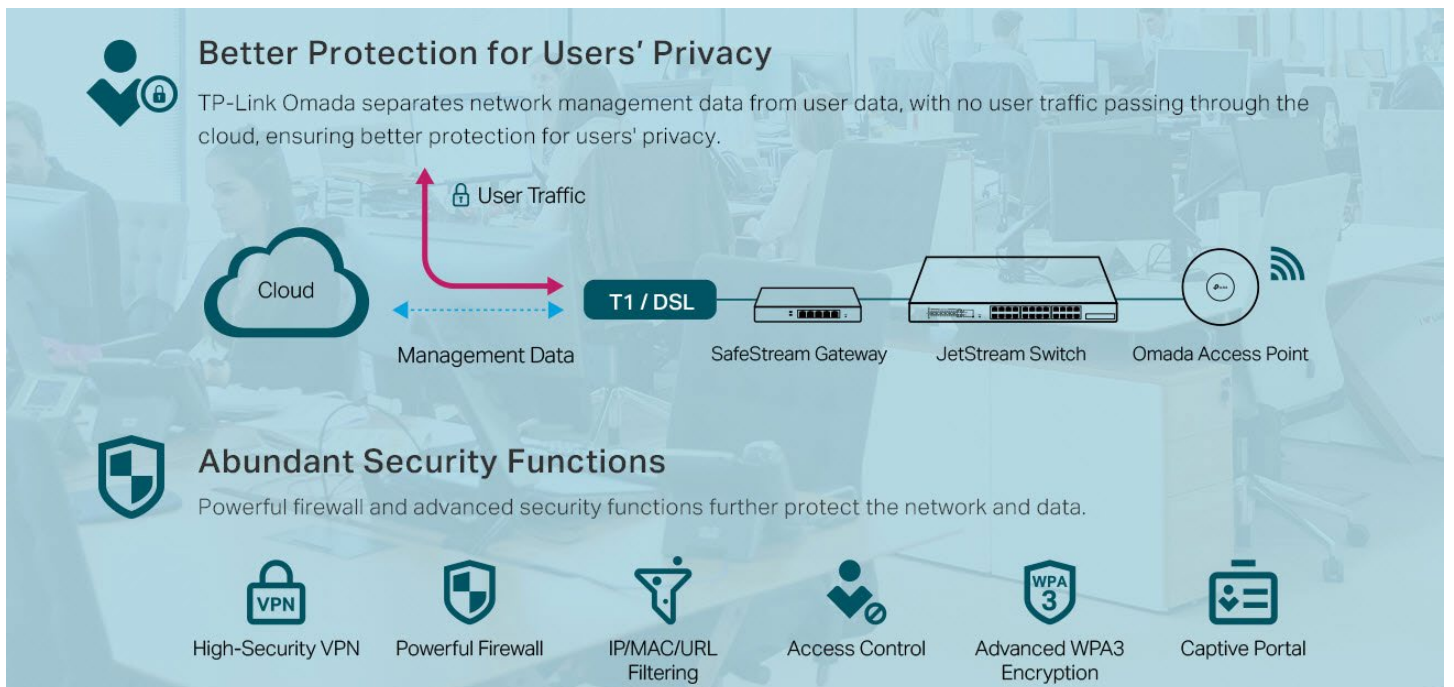

# Specifications

Model		ER7206 V2
Product Picture		
Product Description		Omada Gigabit VPN Router
Hardware	Standards and Protocols	IEEE 802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE 802.3x, IEEE 802.1q, TCP/IP, DHCP, ICMP, NAT, PPPoE, NTP, HTTP, HTTPS, DNS, IPSec, PPTP, L2TP, OpenVPN, WireGuard VPN, GRE VPN, SNMP
	Interface	1 Gigabit SFP WAN/LAN Port 1 Gigabit WAN port 4 Gigabit LAN/WAN ports
	USB	1 USB3.0 (supports USB LTE dongle and USB Storage)
	Network Media	10BASE-T: UTP category 3, 4, 5 cable (Max 100 m) EIA/TIA-568 100Ω STP (Max 100 m) 100BASE-TX: UTP category 5, 5e cable (Max 100 m) EIA/TIA-568 100Ω STP (Max 100 m) 1000BASE-T: UTP category 5, 5e, 6 cable (Max 100 m)
	Button	Reset button
	Power Supply	12VDC / 1A Power Adapter
	Flash	128 MB NAND
	DRAM	512 MB DDR4
	LED	PWR, SYS, SFP, USB, WAN (1000M Link/Act, 100/10M Link/Act), WAN/LAN (1000M Link/Act, 100/10M Link/Act)
	Max Power Consumption	7.5 W (with USB 3.0 connected) 4.5 W (without USB 3.0 connected)
	Surge Protection	4 kV surge protection
	Mounting	Desktop/ Wall-mounting
	Dimensions ( W x D x H )	8.9 × 5.2 × 1.4 in (226 × 131 × 35 mm)
SDN Support	Hardware Controller (OC200/OC300)	Automatic Device Discovery Intelligent Network Monitoring Abnormal Event Warnings Unified Configuration
	Software Controller	Reboot Schedule Captive Portal Configuration

Model		ER7206 V2
Performance <sup>1</sup>	Concurrent Session	150,000
	New Sessions /Second	5,300
	Static IP NAT Throughput (Upload / Download)	945.3 Mbps / 940.5 Mbps
	DHCP NAT Throughput (Upload / Download)	939.6 Mbps / 940.9 Mbps
	PPPoE NAT Throughput (Upload / Download)	943.6 Mbps / 940.9 Mbps
	L2TP NAT Throughput (Upload / Download)	880.1 Mbps / 859.0 Mbps
	PPTP NAT Throughput (Upload / Download)	855.0 Mbps / 907.2 Mbps
	66 Byte Packet forwarding rate (Upload / Download)	1,453,489 pps / 1,453,488 pps
	1,518 Byte Packet forwarding rate (Upload / Download)	81,279 pps / 81,275 pps
	IPSec VPN Throughput	ESP-SHA1-AES256: 617.1 Mbps ESP-SHA256-AES256: 592.8 Mbps ESP-SHA384-AES256: 592.4 Mbps ESP-SHA512-AES256: 604.5 Mbps
	GRE	Unencrypted: 611.9 Mbps Encrypted: 325.0 Mbps
	WireGuard VPN	341.3 Mbps
	SSL VPN	131.6 Mbps
	OpenVPN	139.1 Mbps
	L2TP VPN Throughput	Unencrypted: 977.4 Mbps Encrypted: 334.6 Mbps
PPTP VPN Throughput	Unencrypted: 1064.1 Mbps Encrypted: 206.8 Mbps	
Basic Functions	WAN Connection Type	Static IP Dynamic IP PPPoE (supports MRU Configuration) PPTP L2TP
	DHCP	DHCP Server DHCPv6 PD Server (only in Standalone Mode) DHCP Options Customization DHCP Address Reservation Multi-IP Interfaces Multi-Net DHCP
	MAC Clone	Modify WAN/LAN MAC Address <sup>2</sup>
	IPTV	IGMP v2/v3 Proxy, Custom Mode, Bridge Mode
	IPv6	StaticIP / SLAAC / DHCPv6 / PPPoE / 6to4Tunnel / PassThrough / Non-Address mode
	Stateful ACL	√

1. Rated specifications are based on test results using software version 2.0.0 Build 20230515 Rel.81487. Device performance may vary as a result of the actual scenario.

2. LAN MAC Address can be modified only in Standalone Mode.

Model		ER7206 V2
Basic Functions	mDNS Repeater	√
	Quality of Service	√
	Bridge VLAN	√
Basic Functions	VLAN	802.1Q VLAN
Transmission	Load Balance	Intelligent Load Balance Application Optimized Routing Link Backup (Timing, Failover) Online Detection
	NAT	One-to-One NAT Multi-Net NAT Port Forwarding Port Triggering <sup>1</sup> NAT-DMZ FTP/H.323/SIP/IPSec/PPTP ALG UPnP
	Routing	Static Routing Policy Routing RIP <sup>2</sup> OSPF <sup>2</sup>
	Session Limit	IP-based Session Limit
	Bandwidth Control	IP-based Bandwidth Control
	VPN	IPSec VPN
PPTP VPN		PPTP VPN Server PPTP VPN Client (10) <sup>3</sup> 50 Tunnels PPTP with MPPE Encryption
L2TP VPN		L2TP VPN Server L2TP VPN Client (10) <sup>3</sup> 50 Tunnels L2TP over IPSec
GRE		Only in Standalone Mode
WireGuard VPN		√
SSL VPN		50 Tunnels
OpenVPN		OpenVPN Server OpenVPN Client (5) <sup>3</sup> 55 OpenVPN Tunnels "Certificate + Account" Mode Full Mode

1. Port Triggering is supported only in Standalone Mode.

2. RIP and OSPF are supported only in Standalone Mode.

3. For PPTP VPN and L2TP VPN, ER7206 V2 can connect with up to 10 VPN servers. For OpenVPN, ER7206 V2 can connect with up to 5 VPN servers.

Model		ER7206 V2
Security	Attack Defense	TCP/UDP/ICMP Flood Defense Block TCP Scan (Stealth FIN/Xmas/Null) Block Ping from WAN
	Filtering	Web Group Filtering <sup>1</sup> URL Filtering Web Security <sup>1</sup>
	DNS Proxy	DNSSEC, DoH, and DoT
	ARP Inspection	Sending GARP Packets ARP Scanning <sup>2</sup> IP-MAC Binding
	Access Control	Source/Destination IP Based Access Control
Authentication	Web Authentication	No Authentication Simple Password <sup>3</sup> Hotspot (Local User / Voucher <sup>3</sup> / SMS <sup>3</sup> / Radius <sup>3</sup> ) External Radius Server External Portal Server <sup>3</sup> LDAP <sup>4</sup>
Management	Service	Dynamic DNS (Dyndns, No-IP, Peanuthull, Comexe, DDNS Customization)
	Maintenance	Web Management Interface Remote Management Export & Import Configuration SNMP v1/v2c/v3 Diagnostics (Ping & Traceroute) <sup>5</sup> NTP Synchronize <sup>5</sup> Port Mirroring CLI (only in Standalone Mode) Syslog Support
Others	Certification	CE, FCC, RoHS
	Package Contents	ER7206 V2, Power Adapter, Quick Installation Guide
	System Requirements	Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7/8/8.1/10 MAC OS, NetWare, UNIX or Linux
	Environment	Operating Temperature: 0 °C to 40 °C (32 °F to 104 °F) Storage Temperature: -40 °C to 70 °C (-40 °F to 158 °F) Operating Humidity: 10% to 90% non-condensing Storage Humidity: 5% to 90% non-condensing

1. Web Group Filtering and Web Security are supported only in Standalone Mode.
2. ARP Scanning is supported only in Standalone Mode.
3. The following web authentication methods are supported only in Controller Mode: Simple Password, Voucher, SMS, Radius, and External Portal Server.
4. LDAP is supported only in Standalone Mode.
5. Diagnostics (Ping & Traceroute) and NTP Synchronize are supported only in Standalone Mode.



# Ordering Information

## Host Router

Model	Description
ER7206 V2	Omada Gigabit VPN Router

## SFP Modules

Model	Description
TL-SM311LS	Gigabit SFP module, Single-mode, LC interface, Up to 20km distance
TL-SM311LM	Gigabit SFP module, Multi-mode, LC interface, Up to 550m distance
TL-SM321A	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 20 km
TL-SM321A-2	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 2 km
TL-SM321B	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 20 km
TL-SM321B-2	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 2 km

## RJ45 SFP Modules

Model	Description
TL-SM331T	1000BASE-T RJ45 SFP Module

\* Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: [www.tp-link.com](http://www.tp-link.com).

\* Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2023 TP-Link