



# USB to Lightning™ Cable - Angled - 1m (3.3ft) / 2 m (6.6 ft.) - Black

RUSBLTMMxxMBR

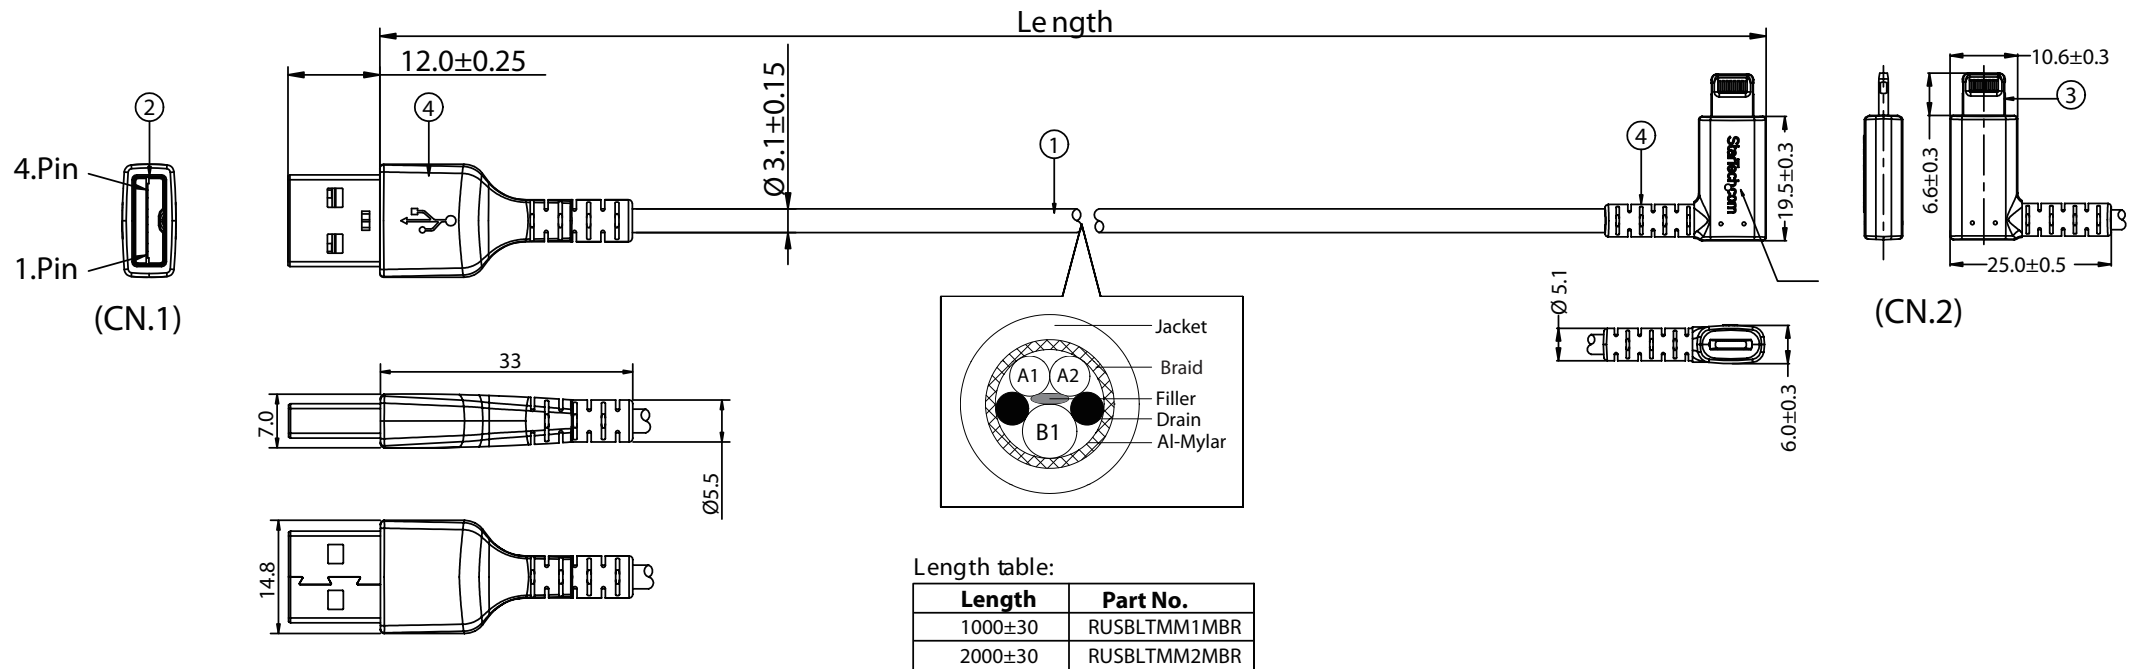

(A). Wire Pin Assignment and Wire Description.

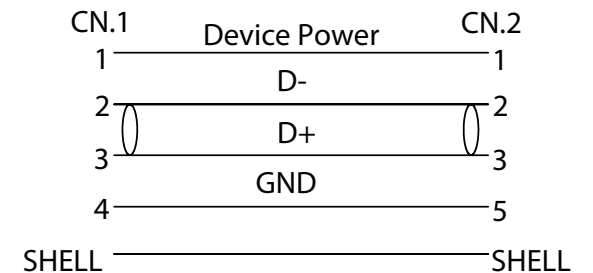

(B). Electrical Testing :

- a. Open/Short:100%. Testing Line-Process.
- b. HI-POT: 100V AC/0.1sec.
- c. Insulation Resistance: 10MΩ (MIN) 100V DC

|      |  |      |
|------|--|------|
| ④    | MOLDED TPE BLACK   | /    |
| ③    | LIGHTNING PLUG, (TERMINAL:GOLD PLATED, SHELL:NI-PLATED)              | 1PCS |
| ②    | USB 2.0 A TYPE 4Pin MALE, (TERMINAL: GOLD PLATED, SHELL: NI-PLATED)  | 1PCS |
| ①    | USB 2.0 CABLE [32AWG*2C+22AWG*1C+2E]+AB OD:3.1mm<br>JACKET TPE BLACK | /    |
| ITEM | MATERIALS LIST & SPEC. DESCRIPTION                                   | Q'TY |