


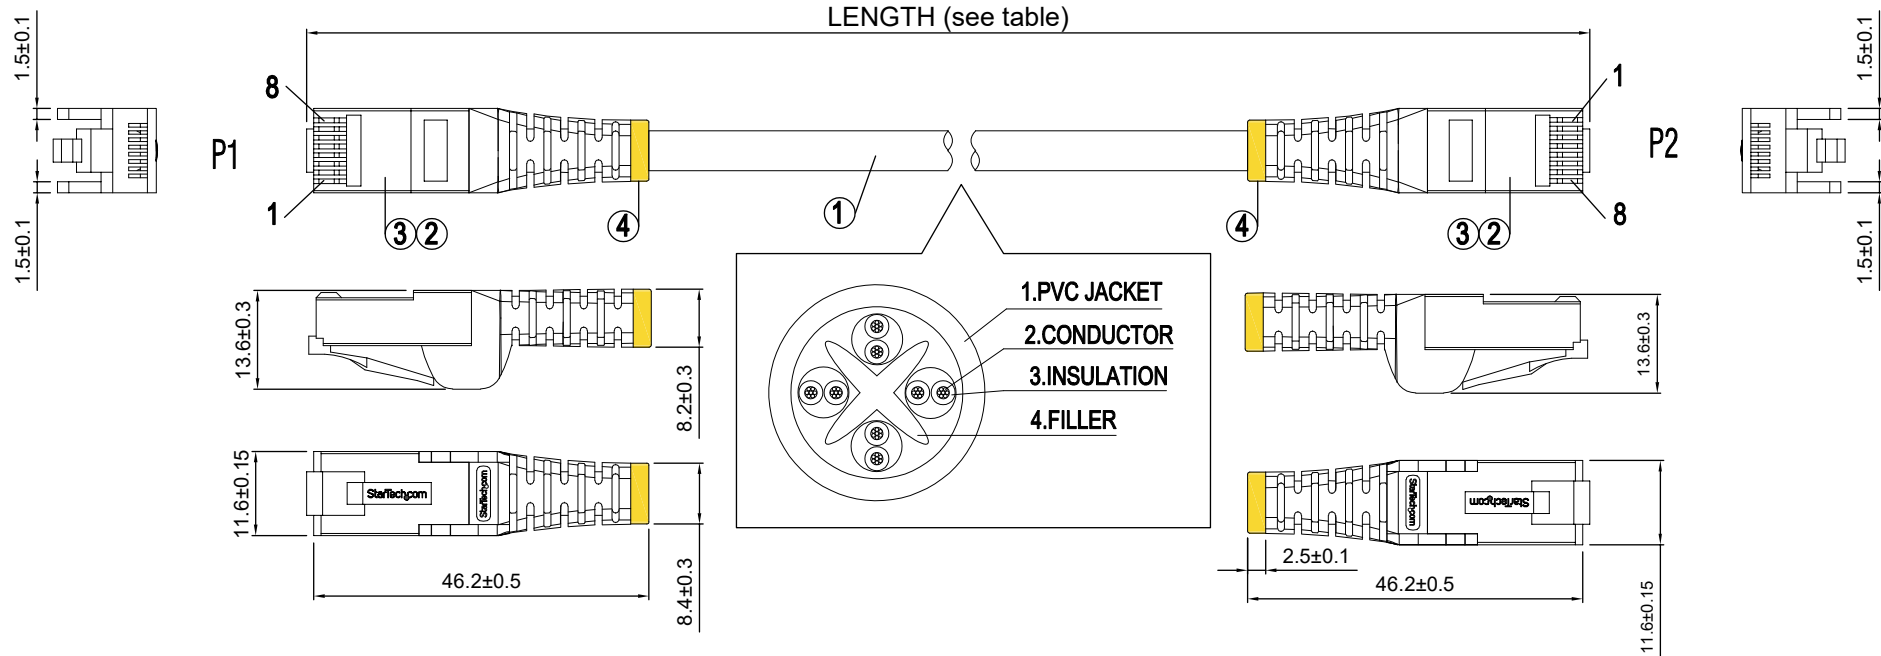

PART NUMBER	LENGTH	TOLERANCE
N6PATCH6Inyy	152mm	+20/-0mm
N6PATCH1yy	305mm	+20/-0mm
N6PATCH2yy	610mm	+20/-0mm
N6PATCH3yy	915mm	+20/-0mm
N6PATCH4yy	1220mm	+25/-0mm
N6PATCH5yy	1525mm	+25/-0mm
N6PATCH6yy	1830mm	+25/-0mm
N6PATCH7yy	2135mm	+30/-0mm
N6PATCH8yy	2440mm	+30/-0mm
N6PATCH9yy	2745mm	+30/-0mm
N6PATCH10yy	3050mm	+30/-0mm

N6PATCH12yy	3660mm	+30/-0mm
N6PATCH14yy	4270mm	+40/-0mm
N6PATCH15yy	4575mm	+40/-0mm
N6PATCH20yy	6100mm	+40/-0mm
N6PATCH25yy	7625mm	+80/-0mm
N6PATCH30yy	9146mm	+80/-0mm
N6PATCH35yy	10670mm	+80/-0mm
N6PATCH50yy	15245mm	+80/-0mm
N6PATCH75yy	22865mm	+100/-0mm
N6PATCH100yy	30490mm	+100/-0mm
N6PATCH125yy	38125mm	+100/-0mm
N6PATCH150yy	45750mm	+100/-0mm

COLOR	CODE (yy)
GRAY	GR
BLUE	BL
BLACK	BK
GREEN	GN
ORANGE	OR
PURPLE	PL
WHITE	WH
RED	RD
YELLOW	YL

PINOUT:


P1	COLOR	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
4	BLUE	4
5	WHITE/BLUE	5
7	WHITE/BROWN	7
8	BROWN	8

SPEC:

- CABLE CM TYPE 24AWG 4PR 75°C TIA/EIA-568B 2-1 CAT 6 UTP 650MHZ
JACKET PVC COLOR: yy OD:6.1mm (PRINTING "StarTech.com")
- CONNECTOR CAT6 RJ45 8P8C LONG TELEPHONE PLUG GOLD PLATED CONTACTS
- MOLDING PVC COLOR: yy
- MOLDING PVC COLOR: YELLOW(PANTONE 123C)

NOTE: Complies with IEEE 802.3bt Type4 standard

THIRD ANGLE PROJECTION



GENERAL NOTES

DIMENSIONS ARE IN MM - DO NOT SCALE

THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS PROPERTY OF STARTECH.COM

StarTech.com

PRODUCT ID	N6PATCHxyyy		
DESCRIPTION	CAT6 Snagless Gigabit Ethernet Cable - 650MHz 100W PoE RJ45 UTP		
DO NOT SCALE	SHEET: 1 OF: 1	UPLOAD DATE: 9/22/2023	